



 **APLICACIONES**

Depósitos multifuncionales gracias a su construcción, ideales tanto en instalaciones de agua sanitaria, grupos de presión o vasos de expansión para calefacción.

 **APPLICATIONS**

Multi-functional tanks thanks to its making, suitable for sanitary water installations, pressure units or expansion containers for heating systems.

 **APPLICATIONS**

Réservoirs multifonctionnels de par leur construction, idéaux en installations d'eau sanitaire, groupes de pression ou vases d'expansion pour chauffage

CARACTERÍSTICAS

Depósitos con membrana fija.
Capacidad: 8 l. - 500 l.
Presión máxima: 10 BAR
Temperatura del líquido: -10°C / 99°C.
Homologados y conformes a la directiva 2014/68/UE.
Garantía de 3 años.

CHARACTERISTICS

Fixed membrane tanks.
Capacity: 8 l. - 500 l.
Max. pressure: 10 BAR
Temperature of liquid: -10°C / 99°C.
Approved and in accordance with 2014/68/UE standard.
3-year guarantee.

CARACTÉRISTIQUES

Réservoirs à membrane fixe.
Capacité: 8 l. - 500 l.
Pression max.: 10 BAR
Température de liquide: -10°C / 99°C.
Homologués et conformes à la directive 2014/68/UE.
Garantie de 3 ans.


DIMENSIONES Y PESOS

Dimensions and weights - Dimensions et poids


Descripción <i>Description</i>	Materiales <i>Materials - Matériels</i>
Exterior depósito <i>Outside tank</i> <i>Extérieur du dépôt</i>	Chapa de acero embutido con pintura exterior epoxi <i>Embossed steel with epoxy exterior paint</i> <i>Acier appuyé avec peinture extérieure epoxi</i>
Interior depósito <i>Inside tank</i> <i>Intérieur du Dépôt</i>	Tratamiento TOP-PRO (anticorrosivo, electroestático y atóxico) <i>TOP-PRO treatment (anti-corrosion, electro-static and atoxic)</i> <i>Traitement TOP-PRO (anticorrosif, électrostatique et atoxique)</i>
Protección interna de la conexión del agua <i>Water connection internal protection</i> <i>Raccordement interne de l'eau</i>	NYLON 66
Membrana <i>Membrane</i>	Butilo para uso alimentario <i>Butyl for food use</i> <i>Butyle pour usage alimentaire</i>

DIMENSIONES Y PESOS

Dimensions and weights - Dimensions et poids

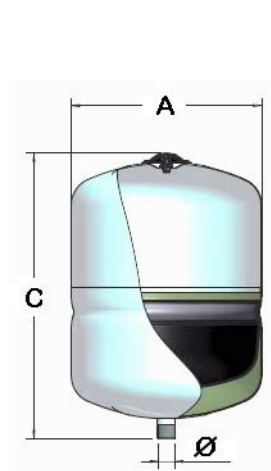

TIPO A

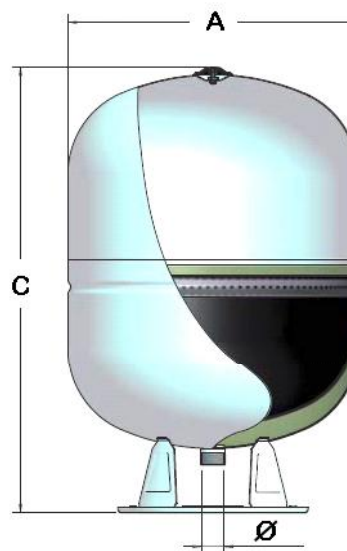

TIPO B

Modelo <i>Model</i> <i>Modèle</i>	Tipo <i>Type</i>	Código <i>Code</i>	Capacidad <i>Capacity</i> <i>Capacité</i> (L)	Presión máx. <i>Max. pressure</i> <i>Pression max.</i> (BAR)	Presión prec. <i>Tara pressure</i> <i>Pression tare</i> (BAR)	Dimensiones <i>Dimensions</i> (mm)			Embalaje (mm) <i>Packaging</i> <i>Emballage</i>		
						A	C	Ø	X	Y	Z
Sanitario 8 l.	A	2551	8	10	3	205	280	¾"	210	210	320
Sanitario 18 l.	A	2552	18	10	3	270	410	¾"	280	280	450
Sanitario 24 l.	A	2553	24	10	3	320	330	1"	330	330	375
Sanitario 50 l. V	B	2554	50	10	3	400	585	1"	410	410	610
Sanitario 80 l.	B	2555	80	10	3	400	820	1"	410	410	860
Sanitario 100 l.	B	2556	100	10	3	500	735	1¼"	510	510	830
Sanitario 150 l.	B	2557	150	10	3	500	935	1¼"	510	510	1040
Sanitario 200 l.	B	2558	200	10	3	600	1020	1¼"	610	610	1110
Sanitario 300 l.	B	2559	300	10	3	650	1210	1¼"	660	660	1290
Sanitario 500 l.	B	2560	500	10	3	775	1350	1¼"	785	785	1440